


TH-LC系列高温高压中样染色机

TH-LC SERIES

High-Temperature and High-Pressure Medium Sampling Dyeing Machine

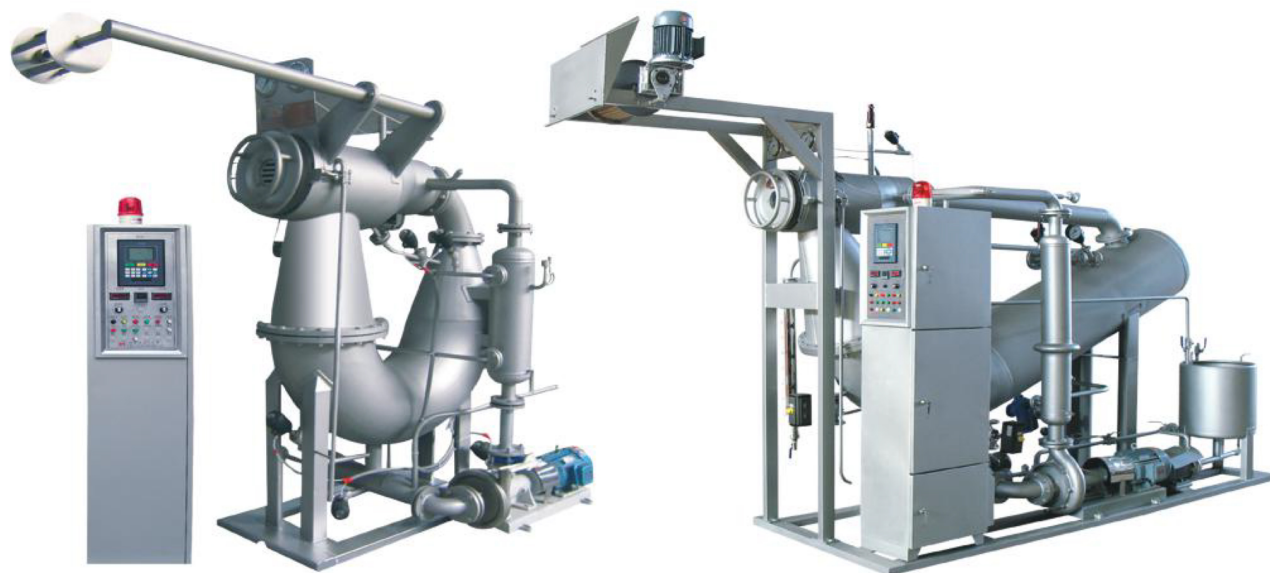

该机器采用新型的喷嘴系统及织物扩散整理系统有效提高了织物的品质及产量，降低了浴比，达到环保节能，迎合当今市场最大需求的挑战设备。

机器载布量分：1kg、10kg、30kg、50kg、100kg等。

The machine adopts new-type nozzle system and fabric diffusion finishing system, which can effectively improve the quality and output of fabrics, reduce bath ratio and realize the functions of environmental protection and energy saving, so as to meet the challenges of large demand in the current market.

The cloth loading amount of the machine includes 1kg, 10kg, 30kg, 50kg and 100kg and so on.

◆主要技术特点

- ★ 低浴比1:6~7：污水排放量减少、染液循环次数增多、处染物色泽更均匀，节约染料、助剂、水、蒸汽和电能。
- ★ 优良的织物扩散效果：织物呈现松弛状，无褶皱，成品处染效果好。
- ★ 更环保：低耗水量，低耗能，低排放量，低耗电量。

◆Main Technical Features

- ★ Low bath ratio 1: 6-7: the sewage discharge quantity is reduced, the circulating times of dyeing liquid is increased, and the dyeing color is more even. Besides, it can save the dye, auxiliaries, water, steam and electricity.
- ★ The excellent fabric diffusion effect: the fabrics are loose and without wrinkles. The dyeing effect of the finished products becomes better.
- ★ More environmentally friendly: low water consumption, low energy consumption, low discharge and low electricity consumption.

机型规格及型号 Machine Specification and Model	容布量 Capacity(kg)	管数/槽数 Number of tubes /chambers	装机功率 Installed power(Kw)	外形尺寸(长×宽×高) Outer Dimension (length×width×height)
TH-LC1	0.5~1	1/1	2.95	1100×1100×1750
TH-LC10	5~10	1/1	3.75	2200×800×2200
TH-LC30	20~30	1/1	6.6	4400×1260×2600
TH-LC50	35~50	1/1	8.1	4670×1320×2720
TH-LC100	70~100	1/1	10.45	5500×1460×3080