

TH-LV系列高温溢流喷射染色机

TH-LV SERIES High-temperature Overflow Jet Dyeing Machine



创新型设计全浸染溢、喷高速染色机，使该机更
适合各种高档次针织及梭织布的染色及前后处理。

Innovation in desian of the full dip-dyeing and jet high-speed
dyeing machine in combination, Makes it suitable for the
dyeing and the processing before and after of various top
grade knitting and tatting cloth.


◆主要技术特点

- ★ 适染面料广泛：适合染棉+安纶、锦纶+安纶、涤纶+安纶、丝绸+安纶、T/C、T/R等各种混纺及纯棉之针织布及桃皮绒、海岛丝绒布、塔丝隆、雪克、N/C、N/R等平织布及各种经纶布。
- ★ 高品质：新型设计全浸染导布管，可提高布匹之匀染度并消除各种直线痕之产生。
- ★ 高效率：机尾设有整布系统，布匹可高速运转，染高密或轻薄布匹时，不包布、不打结、不结串，运转顺畅，大幅度提高产能。
- ★ 低浴比，染色再现性强：储布槽底钢板铺有铁氟隆板，减少布匹在储布槽内移动之阻力，可降低浴比，染色再现性强并可减少布匹挤压所产生的鸡抓痕。

◆Main Technical Features

- ★ High applicability: Suitable for knitting cloth of pure cotton and various kinds of mixed yarns such as dyeing cloth plus spandex, Polyamide plus spandex, polyester plus spandex silk plus spandex, T/C, T/R, and so on, and also for cross woven fabric such as polyester peach skin, island plush cloth, taslon, acetate-proof fabric, N/C, N/R, and various kinds of craftwork cloth.
- ★ High quality: Newly designed full dip-dyeing cloth-guiding tube enhances level dyeing degree and eliminates all kinds of linear marks.
- ★ High efficiency: A cloth-straightening system in the rear of the machine, enabling high running speed and smooth running with no clogging, no knotting and no tying when dyeing high-density or light and thin cloth, productivity greatly improved.
- ★ Low liquor ratio and improved dyeing reproductivity: Cloth storage groove bottom plate relieves resistance of cloth when moving in the cloth storage groove, lowers liquor ratio, improves dyeing reproductivity as well as decrease vestige created in extrusion of cloth.

◆ 机器主要规格 Main specifications of machine

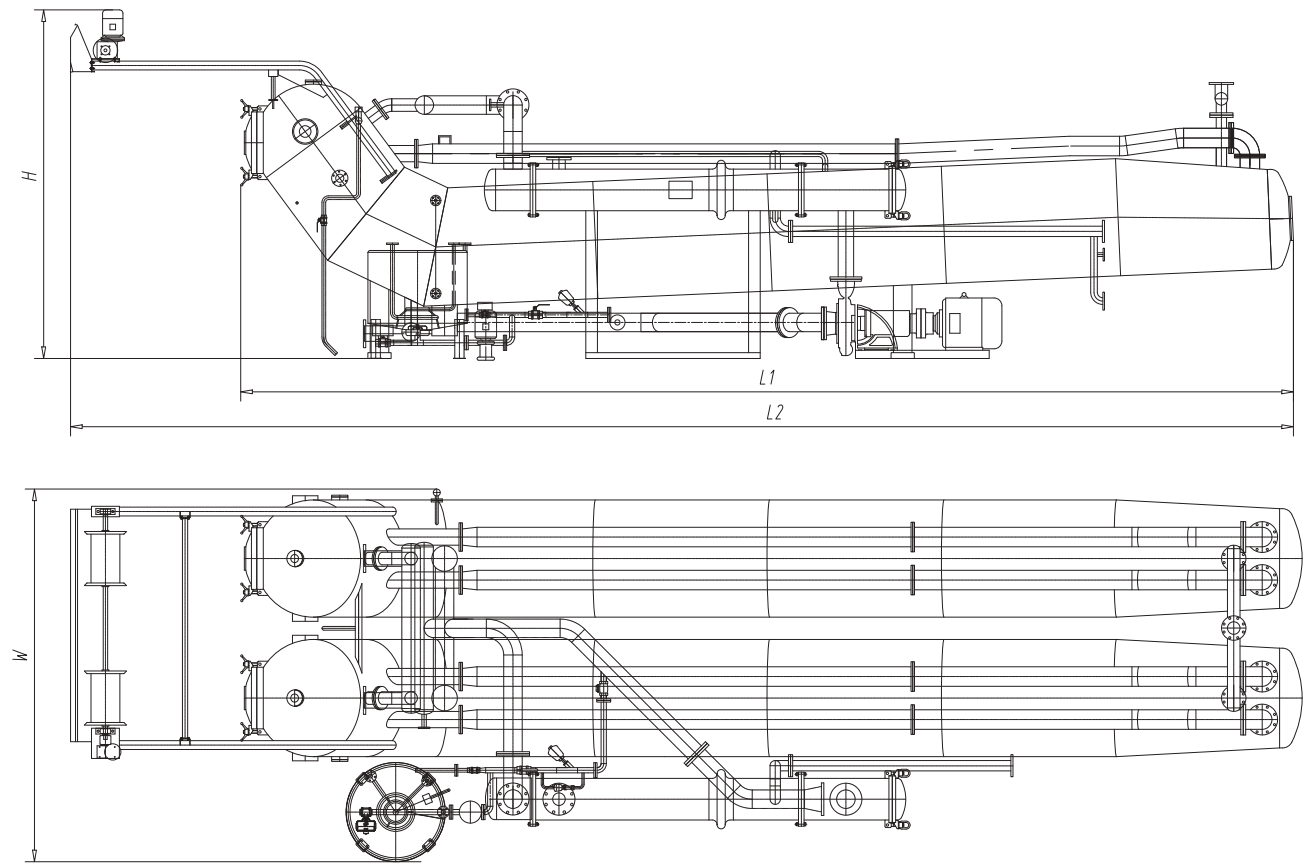

型号 Model	管数/槽数 Number of tubes/chembers	最大容布量 Max.Capacity (kg)	外形尺寸 Dimension		
			L1/L2(mm)	W(mm)	H(mm)
TH-LV-1.0	1/2	500~800	9050/10500	1800	3100
TH-LV-2.0	2/4	1000~1600	9050/10500	3200	3100
TH-LV-4.0	4/8	2000~3200	9050/10500	6100	3200